


R40C

Stub Drill

NEW
2018.10

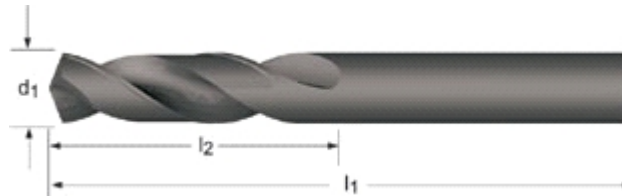

Type C



d1 R Inch	d1 decimal Inch	l2 Inch	l1 Inch	e-code	USD
1/16	0.0625	5/8	1.5/8	R40C1/16	3.07
5/64	0.0781	11/16	1.11/16	R40C5/64	3.10
3/32	0.0938	3/4	1.3/4	R40C3/32	3.03
7/64	0.1094	13/16	1.13/16	R40C7/64	3.10
1/8	0.1250	7/8	1.7/8	R40C1/8	2.96
9/64	0.1406	15/16	1.15/16	R40C9/64	3.14
5/32	0.1563	1"	2.1/16	R40C5/32	3.40
11/64	0.1719	1.1/16	2.1/8	R40C11/64	3.63
3/16	0.1875	1.1/8	2.3/16	R40C3/16	3.87
13/64	0.2031	1.3/16	2.1/4	R40C13/64	4.14
7/32	0.2188	1.1/4	2.3/8	R40C7/32	4.94
15/64	0.2344	1.5/16	2.7/16	R40C15/64	5.06
1/4	0.2500	1.3/8	2.1/2	R40C1/4	5.56
17/64	0.2656	1.7/16	2.5/8	R40C17/64	6.41
9/32	0.2813	1.1/2	2.11/16	R40C9/32	6.86
19/64	0.2969	1.9/16	2.3/4	R40C19/64	7.60
5/16	0.3125	1.5/8	2.13/16	R40C5/16	8.08
5/16	0.3125	1.5/8	2.13/16	R40C5/16-T	¹⁾ 9.61
21/64	0.3281	1.11/16	2.15/16	R40C21/64	9.01
11/32	0.3438	1.11/16	3"	R40C11/32	10.10
23/64	0.3594	1.3/4	3.1/16	R40C23/64	11.65
3/8	0.3750	1.13/16	3.1/8	R40C3/8	12.10
3/8	0.3750	1.13/16	3.1/8	R40C3/8-T	¹⁾ 13.00
25/64	0.3906	1.7/8	3.1/4	R40C25/64	13.80
13/32	0.4063	1.15/16	3.5/16	R40C13/32	14.20

d ₁ R Inch	d ₁ decimal Inch	l ₂ Inch	l ₁ Inch	e-code		USD
27/64	0.4219	2"	3.3/8	R40C27/64		15.70
7/16	0.4375	2.1/16	3.7/16	R40C7/16		15.75
29/64	0.4531	2.1/8	3.9/16	R40C29/64		18.95
15/32	0.4688	2.1/8	3.5/8	R40C15/32		20.30
31/64	0.4844	2.3/16	3.11/16	R40C31/64		20.85
1/2	0.5000	2.1/4	3.3/4	R40C1/2		20.40

¹⁾With tang