

Feed Rate Chart

Alpha Code	Feed in Inches per Revolution (IPR) ± 25%															Ø Diameter				
	1mm/ 1/32"	2mm/ 3/32"	3mm/ 1/8"	4mm/ 5/32"	5mm/ 3/16"	6mm/ 1/4"	8mm/ 5/16"	10mm/ 3/8"	12mm/ 1/2"	15mm/ 9/16"	16mm/ 5/8"	20mm/ 3/4"	25mm/ 1"	30mm/ 1.1/8"	40mm/ 1.5/8"	50mm/ 2"				
A	0.0004	0.0009	0.0011	0.0013	0.0014	0.0017	0.0021	0.0024	0.0027	0.0032	0.0034	0.0043	0.0049	0.0053	0.0061	0.0069				
B	0.0006	0.0011	0.0015	0.0016	0.0018	0.0021	0.0026	0.0031	0.0035	0.0041	0.0043	0.0053	0.0060	0.0065	0.0074	0.0082				
C	0.0006	0.0013	0.0017	0.0020	0.0022	0.0025	0.0031	0.0039	0.0043	0.0049	0.0051	0.0063	0.0071	0.0077	0.0087	0.0094				
D	0.0006	0.0015	0.0021	0.0024	0.0027	0.0031	0.0039	0.0047	0.0051	0.0059	0.0061	0.0074	0.0083	0.0090	0.0100	0.0108				
E	0.0007	0.0017	0.0024	0.0028	0.0031	0.0037	0.0045	0.0055	0.0059	0.0068	0.0071	0.0085	0.0094	0.0102	0.0112	0.0122				
F	0.0007	0.0020	0.0029	0.0033	0.0037	0.0043	0.0054	0.0065	0.0070	0.0080	0.0083	0.0098	0.0108	0.0116	0.0126	0.0135				
G	0.0007	0.0022	0.0033	0.0038	0.0043	0.0050	0.0063	0.0075	0.0081	0.0091	0.0094	0.0110	0.0122	0.0130	0.0140	0.0148				
H	0.0008	0.0026	0.0040	0.0046	0.0051	0.0059	0.0075	0.0090	0.0096	0.0107	0.0110	0.0126	0.0140	0.0148	0.0157	0.0165				
I	0.0008	0.0030	0.0047	0.0053	0.0059	0.0068	0.0087	0.0104	0.0110	0.0122	0.0126	0.0142	0.0157	0.0165	0.0173	0.0181				
J	0.0009	0.0033	0.0053	0.0060	0.0067	0.0078	0.0098	0.0117	0.0124	0.0137	0.0142	0.0159	0.0175	0.0183	0.0191	0.0198				
K	0.0010	0.0036	0.0059	0.0067	0.0075	0.0087	0.0110	0.0130	0.0138	0.0153	0.0157	0.0177	0.0193	0.0201	0.0209	0.0215				
L	0.0011	0.0040	0.0065	0.0073	0.0082	0.0094	0.0120	0.0142	0.0152	0.0165	0.0169	0.0191	0.0207	0.0215	0.0224	0.0231				
M	0.0012	0.0043	0.0071	0.0080	0.0089	0.0102	0.0130	0.0154	0.0165	0.0177	0.0181	0.0205	0.0220	0.0228	0.0238	0.0248				
N	0.0013	0.0047	0.0077	0.0086	0.0095	0.0110	0.0140	0.0165	0.0179	0.0189	0.0193	0.0219	0.0234	0.0242	0.0253	0.0265				
S	0.0003	0.0006	0.0008	0.0010	0.0012	0.0015	0.0020	0.0031	0.0039	0.0048	0.0051	0.0059	0.0070	0.0070	0.0090					
T	0.0006	0.0011	0.0016	0.0020	0.0024	0.0028	0.0035	0.0043	0.0051	0.0063	0.0067	0.0075	0.0080	0.0090	0.0100					
U	0.0010	0.0019	0.0028	0.0031	0.0035	0.0042	0.0055	0.0067	0.0079	0.0088	0.0091	0.0094	0.0110	0.0120	0.0140					
V	0.0015	0.0027	0.0039	0.0045	0.0051	0.0060	0.0079	0.0098	0.0110	0.0122	0.0126	0.0134	0.0160	0.0170	0.0200					
W	0.0019	0.0035	0.0051	0.0059	0.0067	0.0079	0.0102	0.0130	0.0150	0.0165	0.0169	0.0177	0.0190	0.0190	0.0200					
X	0.0022	0.0041	0.0059	0.0071	0.0083	0.0098	0.0130	0.0165	0.0189	0.0210	0.0217	0.0228								
Y	0.0027	0.0049	0.0071	0.0087	0.0102	0.0125	0.0169	0.0217	0.0276	0.0276	0.0276	0.0291								
Z	0.0037	0.0068	0.0098	0.0128	0.0157	0.0210	0.0315	0.0394	0.0433	0.0463	0.0472	0.0472								

How To Use This Chart to Find Cutting Feed Rate (IPR):

1. Find your Alpha Code on the AMG Chart (example: 279 U : U is the Alpha Code)
2. Find the closest diameter for your cutting application on the chart to find your IPR

Application Material Groups (AMG)		Hardness HRC	ISO
1. Steel	1.1 Magnetic soft steel	12L14, 12L15	<120 HB P 1
	1.2 Structural Steel/ case carburising steel	1005-1025, 1214, 1215, A36	<200 HB P 1
	1.3 Plain Carbon steel	1030-1060, 1050-1060, 1144-1146	<24 P 2
	1.4 Alloy steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	<24 P 3
	1.5 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>24<38 P 4
	1.6 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>38 H 1
	1.7 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	49-55 H 3
	1.8 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	55-63 H 4
2. Stainless Steel	2.1 Free machining Stainless Steel	200, 303, 416, 420F, 430F, 440	<24 M 1
	2.2 Austenitic	301, 302, 304, 316, 321, 330, CUSTOM 455, AM-350	<24 M 3
	2.3 Ferritic + Austenitic, Martensitic	318-329, 400-446, DUPLEX	<32 M 2
	2.4 Precipitation Hardened	15-5PH, Custom 450 17-4PH	<32 S 2
3. Cast Iron	3.1 Lamellar graphite	Grey, G10, Gg40, J431C, A48 CLASS 20	<150 HB K 1
	3.2 Lamellar graphite	Grey, GG25-Gg40, J158, A48 CLASS 40-60	>150 HB<32 K 2
	3.3 Nodular graphite/ Malleable Cast Iron	A220, A436, A439, A602, Black, GGG40-GGG70	<200 HB K 3
	3.4 Nodular graphite/ Malleable Cast Iron	Black Gts/Gtw, J434C	>200 HB<32 K 4
4. Titanium	4.1 Titanium, unalloyed	Commercially Pure	<200 HB S 1
	4.2 Titanium, alloyed	6Al4V, 6A14V-2Sn, Monel, Monel K	<28 S 2
	4.3 Titanium, alloyed	6Al4V-4Mo, 7A14V-4Mo, 4911-4967	>28<38 S 3
5. Nickel	5.1 Nickel, unalloyed	Commercially Pure, 17644, 200, 5553	<150 HB S 1
	5.2 Nickel, alloyed	Monel 400, Hastelloy C, Inconel 625, Waspaloy	<28 S 2
	5.3 Nickel, alloyed	Inconel 718, Nimonic 75-95, Rene 41, Inconel 825, A286	>28<38 S 3
6. Copper	6.1 Copper	Commercially Pure	<100 HB N 3
	6.2 β-Brass, Bronze	314-340, 350-370	<200 HB N 4
	6.3 α-Brass	Alloyed Cu + Al + Fe, Long Chipping	<200 HB N 3
	6.4 High Strength Bronze	Ampco 18-25	<49 N 4
7. Aluminium Magnesium	7.1 Al, Mg, unalloyed	Commercially Pure	<100 HB N 1
	7.2 Al alloyed, Si<0.5%	6061 T6, 7075, 314-340	<150 HB N 1
	7.3 Al alloyed, Si>0.5%<10%	6061 T6, 380-390	<120 HB N 1
	7.4 Al alloyed, Si>10% Mg alloys	Magnesium Whisker Reinforced	<120 HB N 2
8. Synthetic Materials	8.1 Thermoplastics	Ultradid, Polystrol	---
	8.2 Thermosetting plastics	Bakelit, Pertinax	---
	8.3 Reinforced plastic materials	CFK, GFKAFK	---
9. Hard Mat.	9.1 Cermets (Metal-ceramics)	Ferrotic	<54 H
10. Graphite	10.1 Standard graphite	---	O

TAPER LENGTH DRILL




General Purpose Taper Length Parabolic Flute

Heavy-Duty Parabolic Flute design for efficient chip removal. Allows greater drilling depths in one pass. Low thrust design self centering Split Point for easier penetration.

QC91P Bright Finish improves chip flow in soft or non-ferrous materials.

QC91G TiN Coating increases wear resistance and improves tool life.

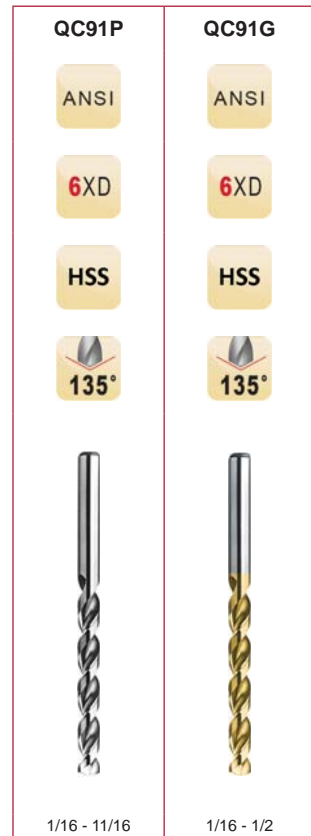

d_1 Ø "/Nr.	d_1 decimal Inch	l_2 Inch	l_1 Inch	Pack Qty	QC91P	QC91G
1/16	0.0625	1.3/4	3"	12	057904	055904
52	0.0635	2"	3.3/4	12	059452	050952
51	0.0670	2"	3.3/4	12	059451	050951
50	0.0700	2"	3.3/4	12	059450	050950
49	0.0730	2"	3.3/4	12	059449	050949
48	0.0760	2"	3.3/4	12	059448	—
5/64	0.0781	2"	3.3/4	12	057905	055905
47	0.0785	2.1/4	4.1/4	12	059447	050947
46	0.0810	2.1/4	4.1/4	12	059446	050946
45	0.0820	2.1/4	4.1/4	12	059445	050945
44	0.0860	2.1/4	4.1/4	12	059444	050944
43	0.0890	2.1/4	4.1/4	12	059443	050943
42	0.0935	2.1/4	4.1/4	12	059442	050942
3/32	0.0938	2.1/4	4.1/4	12	057906	055906
41	0.0960	2.1/2	4.5/8	12	059441	050941
40	0.0980	2.1/2	4.5/8	12	059440	050940
39	0.0995	2.1/2	4.5/8	12	059439	050939
38	0.1015	2.1/2	4.5/8	12	059438	050938
37	0.1040	2.1/2	4.5/8	12	059437	050937
36	0.1065	2.1/2	4.5/8	12	059436	050936
7/64	0.1094	2.1/2	4.5/8	12	057907	055907
35	0.1100	2.3/4	5.1/8	12	059435	050935
34	0.1110	2.3/4	5.1/8	12	059434	050934
33	0.1130	2.3/4	5.1/8	12	059433	—
32	0.1160	2.3/4	5.1/8	12	059432	050932
31	0.1200	2.3/4	5.1/8	12	059431	050931
1/8	0.1250	2.3/4	5.1/8	12	057908	055908
30	0.1285	3"	5.3/8	12	059430	050930
29	0.1360	3"	5.3/8	12	059429	050929
28	0.1405	3"	5.3/8	12	059428	050928
9/64	0.1406	3"	5.3/8	12	057909	055909
27	0.1440	3"	5.3/8	12	059427	—
26	0.1470	3"	5.3/8	12	059426	050926



TAPER LENGTH DRILL

d ₁ Ø "/Nr.	d ₁ decimal Inch	l ₂ Inch	l ₁ Inch	Pack Qty	QC91P	QC91G
25	0.1495	3"	5.3/8	12	059425	050925
24	0.1520	3"	5.3/8	12	059424	050924
23	0.1540	3"	5.3/8	12	059423	—
5/32	0.1563	3"	5.3/8	12	057910	055910
22	0.1570	3.3/8	5.3/4	12	059422	—
21	0.1590	3.3/8	5.3/4	12	059421	050921
20	0.1610	3.3/8	5.3/4	12	059420	050920
19	0.1660	3.3/8	5.3/4	12	059419	050919
18	0.1695	3.3/8	5.3/4	12	059418	050918
11/64	0.1719	3.3/8	5.3/4	12	057911	055911
17	0.1730	3.3/8	5.3/4	12	059417	050917
16	0.1770	3.3/8	5.3/4	12	059416	050916
15	0.1800	3.3/8	5.3/4	12	059415	050915
14	0.1820	3.3/8	5.3/4	12	059414	050914
13	0.1850	3.3/8	5.3/4	12	059413	050913
3/16	0.1875	3.3/8	5.3/4	12	057912	055912
12	0.1890	3.5/8	6"	12	059412	—
11	0.1910	3.5/8	6"	12	059411	050911
10	0.1935	3.5/8	6"	12	059410	—
9	0.1960	3.5/8	6"	12	059409	050909
8	0.1990	3.5/8	6"	12	059408	050908
7	0.2010	3.5/8	6"	12	059407	050907
13/64	0.2031	3.5/8	6"	12	057913	055913
6	0.2040	3.5/8	6"	12	059406	050906
5	0.2055	3.5/8	6"	12	059405	050905
4	0.2090	3.5/8	6"	12	059404	050904
3	0.2130	3.5/8	6"	12	059403	050903
7/32	0.2188	3.5/8	6"	12	057914	055914
2	0.2210	3.3/4	6.1/8	12	059402	050902
1	0.2280	3.3/4	6.1/8	12	059401	—
15/64	0.2344	3.3/4	6.1/8	12	057915	055915
1/4	0.2500	3.3/4	6.1/8	12	057916	055916
17/64	0.2656	3.7/8	6.1/4	6	057917	055917
9/32	0.2813	3.7/8	6.1/4	6	057918	055918
19/64	0.2969	4"	6.3/8	6	057919	055919
5/16	0.3125	4"	6.3/8	6	057920	055920
21/64	0.3281	4.1/8	6.1/2	6	057921	055921
11/32	0.3437	4.1/8	6.1/2	6	057922	055922
23/64	0.3594	4.1/4	6.3/4	6	057923	—
3/8	0.3750	4.1/4	6.3/4	6	057924	055924
25/64	0.3906	4.3/8	7"	6	057925	055925
13/32	0.4063	4.3/8	7"	6	057926	055926
27/64	0.4219	4.5/8	7.1/4	6	057927	055927
7/16	0.4375	4.5/8	7.1/4	6	057928	055928
29/64	0.4531	4.3/4	7.1/2	6	057929	055929
15/32	0.4687	4.3/4	7.1/2	6	057930	—
31/64	0.4844	4.3/4	7.3/4	6	057931	—
1/2	0.5000	4.3/4	7.3/4	6	057932	055932
33/64	0.5156	4.3/4	8"	1	057933	—
17/32	0.5313	4.3/4	8"	1	057934	—
35/64	0.5469	4.7/8	8.1/4	1	057935	—
9/16	0.5625	4.7/8	8.1/4	1	057936	—
37/64	0.5781	4.7/8	8.3/4	1	057937	—
19/32	0.5937	4.7/8	8.3/4	1	057938	—
5/8	0.6250	4.7/8	8.3/4	1	057940	—
21/32	0.6563	5.1/8	9"	1	057942	—
11/16	0.6875	5.3/8	9.1/4	1	057944	—