




# H33200XXQP

## LiteFit Plus Full Body Harness

### FEATURES

- Built in Relief Handles assist user to reach a gravity override seated position after a fall arrest
- Quick connect chest connection
- Enhanced comfort with foam padding on back and shoulder
- 5-point adjustments for optimal fit
- Meets requirements of ANSI Z359.11

**LITEFIT™**  
SAFETY HARNESS

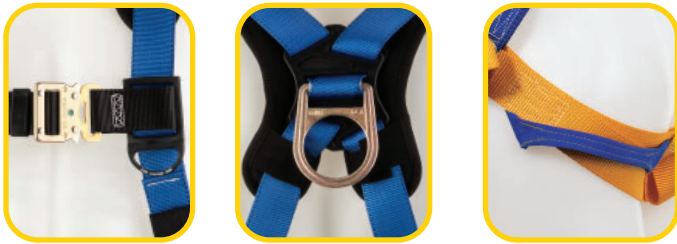

### SPECIFICATIONS

Model No.	Size	D-Rings	D-Ring Material	Chest Connection	Leg Connection	Capacity	Approx. Weight	Compliance Standards
H332001XQP	Small	Back; Hip	Steel	Quick Connect	Tongue Buckle	400 lbs (181 kg)	3.8 lbs (1.7 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926
H332002XQP	Medium/Large	Back; Hip	Steel	Quick Connect	Tongue Buckle	400 lbs (181 kg)	3.8 lbs (1.7 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926
H332004XQP	X-Large	Back; Hip	Steel	Quick Connect	Tongue Buckle	400 lbs (181 kg)	3.9 lbs (1.8 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926
H332005XQP	XX-Large	Back; Hip	Steel	Quick Connect	Tongue Buckle	400 lbs (181 kg)	3.9 lbs (1.8 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926

\*See User Instructions for more information.

**⚠ WARNING:** Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

# Technical Data Sheet