


End Stanchion

FEATURES

- 7½ foot aluminum round tube
- 4 inch outside diameter and ½ inch wall thickness
- Comes with A320001 D-Bolt Anchor



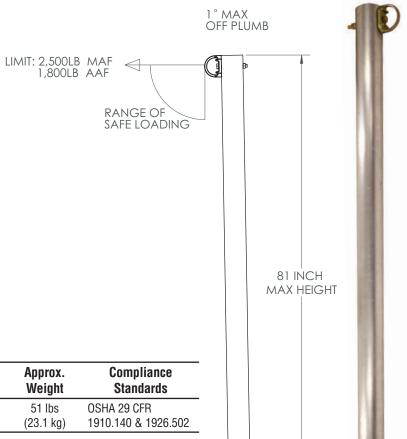

SPECIFICATIONS

| Model No. | Material | Connector | Outside Diameter | Length | Approx. Weight | Compliance Standards |
|-----------|---------------------|-----------|---------------------|-------------------|---------------------|------------------------------------|
| L400001 | 6061-T6 Aluminum | A320001 | 4 in (102 mm) | 7.5 ft (2.3 m) | 51 lbs (23.1 kg) | OSHA 29 CFR 1910.140 & 1926.502 |
| | | | | | | |

ANCHORAGE MUST BE CAPABLE OF RESISTING:

5,000LB SHEAR 5,000LB DOWN 34,000 FT.LB MOMENT

MARNING: Compliant fall protection equipment must only be used as it was designed. Users MUST read and understand all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to follow these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet